


**MORPAC  
INDUSTRIES**

## **LH62-6 BOLTED GRIP**

12,000 lb.  
6-Bolt

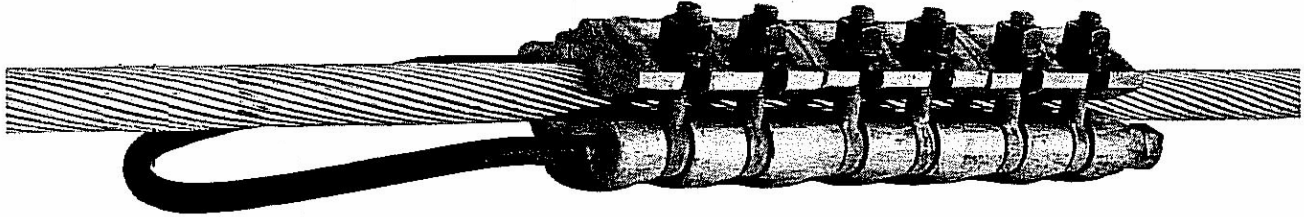

### 6-Bolt Grip Features:

- Rated up to 12,000 lbs of tension on standard conductor (up to 9,000 lbs on ACSS)
- Available in conductor diameters up to 1-1/4 inch
- Equipped with spherical nuts/washers to accommodate any misalignment and provide accurate, repeatable fastener torque
- Bail is cold-rolled and heat treated steel for strength. Eyebolts are forged steel for strength.
- The body is heat treated aluminum for light weight. Entire assembly is only 22 lbs.
- It is recommended that for high voltage conductors, the grip be ordered bored for the conductor size. Specify conductor type and diameter when ordering.
- Grips are custom-bored for specific conductor and therefore available only for purchase.

## **MORPAC INDUSTRIES, INC.**

117 Frontage Road North, Suite A  
Pacific, WA 98047-1052


Website: <http://www.morpac.com/>  
Email: [actuators@morpac.com](mailto:actuators@morpac.com)

Phone: (253) 735-8922  
Fax: (253) 735-8933

July 2007

## **LH62-8 BOLTED GRIP**

20,000 lb.  
8-Bolt



### 8-Bolt Grip Features:

- Rated up to 20,000 lbs of tension on standard conductor (up to 15,000 lbs. on ACSS)
- Available in conductor diameters up to 2 1/2 inch
- Equipped with spherical nuts/washers to accommodate any misalignment and provide accurate, repeatable fastener torque
- Bail is cold-rolled and heat treated steel for strength. Eyebolts are forged steel for strength.
- The body is heat treated aluminum for light weight. Entire assembly is only 65 lbs.
- It is recommended that for high voltage conductors, the grip be ordered bored for the conductor size. Specify conductor type and diameter when ordering.
- Grips are custom-bored for specific conductor and therefore available only for purchase.

## **MORPAC INDUSTRIES, INC.**


117 Frontage Road North, Suite A  
Pacific, WA 98047-1052

Website: <http://www.morpac.com/>  
Email: [actuators@morpac.com](mailto:actuators@morpac.com)

Phone:(253) 735-8922  
Fax: (253) 735-8933

## **LH62-16 BOLTED GRIP**

40,000 lb  
16-Bolt

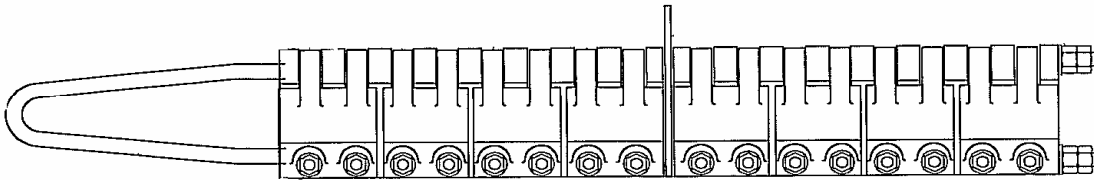

### 16-Bolt Grip Features:

- Rated up to 40,000 lbs of tension on standard conductor (up to 30,000 lbs on ACSS)
- Available in conductor diameters up to 2-1/2 inch
- Equipped with spherical nuts/washers to accommodate any misalignment and provide accurate, repeatable fastener torque
- Bail is cold-rolled and heat treated steel for strength. Eyebolts are forged steel for strength.
- The body is heat treated aluminum for lighter weight. Entire assembly is 125 lbs and comes with a rigging eye.
- It is recommended that for high voltage conductors, the grip be ordered bored for the conductor size. Specify conductor type and diameter when ordering.
- Grips are custom-bored for specific conductor and therefore available only for purchase

## **MORPAC INDUSTRIES, INC.**

117 Frontage Road North, Suite A  
Pacific, WA 98047-1052

Website: <http://www.morpac.com/>  
Email: [actuators@morpac.com](mailto:actuators@morpac.com)

Phone: (253) 735-8922  
Fax: (253) 735-8933